




Function

- Longer mechanical and electrical life, and much quieter than electromechanical step relays.
- Controlled by buttons for light switching from more places, are a practical replacement for three-way switches and cross-bar switches.

Technical Data


- Rated Voltage: 230VAC 50-60Hz
- Rated Current: 16A 250VAC(COSφ=1)
- Contact configuration: 1NO(SPST-NO)
- Mounting: DIN Rail 35 mm(EN 60715)
- Ambient temperature range: -10...+60

Functions

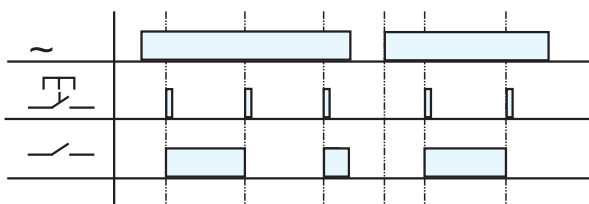

After every impulse, the output contact changes state alternately switching from open to closed and vice versa.

Connection Diagrams

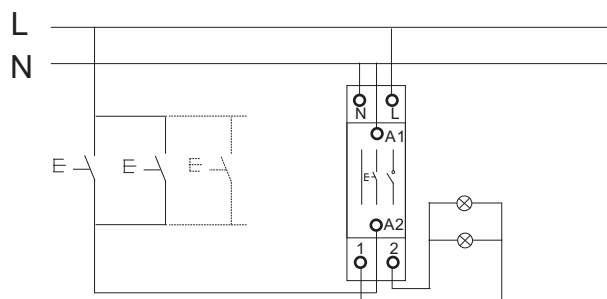

Dimensions(mm)

