


# Connection Cable QE12 series

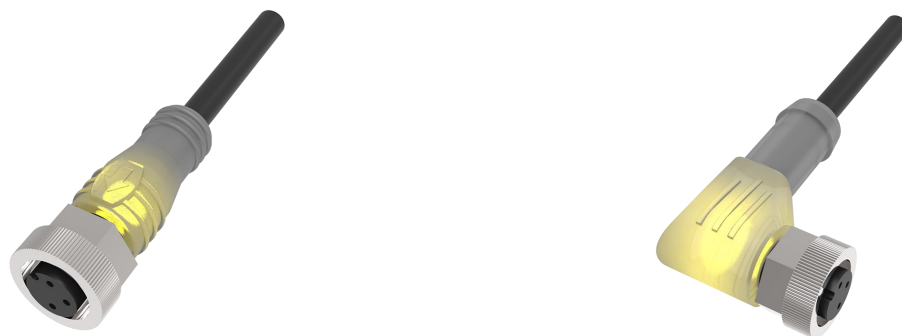

## Model

|    |             |               |    |             |               |
|----|-------------|---------------|----|-------------|---------------|
| 2m | QE12-N3F2-N | QE12-N3F2-N-U | 2m | QE12-N3G2-N | QE12-N3G2-N-U |
| 5m | QE12-N3F5-N | QE12-N3F5-N-U | 5m | QE12-N3G5-N | QE12-N3G5-N-U |

## Connector

|                       |              |                    |                              |
|-----------------------|--------------|--------------------|------------------------------|
| Supply voltage        | 30VDC Max    | LED Indication     | Power:Green;Operation:Yellow |
| Nominal current       | 4A           | Outer covering     | PU                           |
| Insulation resistance | 100MΩ        | Bearering material | Nickel copper alloy          |
| Temperature range     | -30°C...90°C | Protection degree  | IP67                         |
| Output                | NPN          |                    |                              |

## Connection Cable

|                |        |    |           |                                |
|----------------|--------|----|-----------|--------------------------------|
| Material       | PVC    | PU | Core wire | 3*0.34mm <sup>2</sup> (0.2*11) |
| Colour         | Black  |    | Length    | 2m/5m                          |
| Cable diameter | Φ4.4mm |    |           |                                |

## Dimensions

