


◆ **Technical Data:**

Model:SR-12DC-DA-R

GENERAL SPECIFICATIONS

- Timers : 256
- Counters: 256
- Function Blocks: 256
- Operation temp.: -20°C-+55°C
- Storage: -40°C-+70°C
- Protection: IP20(Non-waterproof)
- RTC accuracy: MAX ±2S/day
- RTC Backup at 25 °C: 20 days
- Program and settings Backup:10 years
- Data Power-off retentivity: 10 years
- Dimensions : 72*90*61 (Unit, mm)
- Certificate : CE
- Installation : 35mm-DIN rail or screw for installation
- Modify parameters via keypad LCD: yes
- Supported programming language: FBD
- Expansion capacity: 3 modules (SR-E)
- Password protection: 4-digit number password protection or disable program upload function
- Communication interface: 1 RS485 port(COM1 external -- SR-RS485), 1Ethernet port(10M)
- Communication protocol: Modbus RTU, Modbus TCP

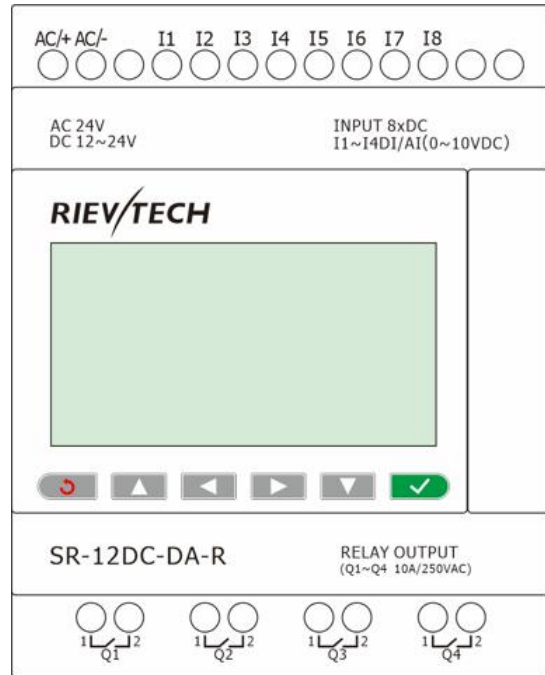


Technical Index



Power supply:	
Nominal voltage	DC12-24V /AC24V
Operating limits	DC 10.8-28.8V AC24V
Immunity from micro power cuts	Typ.5 ms
Max. Startup current	Max. 0.4A
Max. absorbed power	0.25A (10.8V dc); 0.28A (28.8V dc); 0.25A (24V ac)
Protection against polarity inversions	Yes
Input parameters:	
Input No	8 (I1-I8)
Digital input	8 (I1-I8)
Analogue input	4 (I1-I4) (0...10V DC)
Digital inputs (I5-I8)	
Input voltage	DC 0-28.8V AC 0-24V
Input signal0	< 5V DC; <1 mA < 3V AC
Input signal1	> 8V DC; >1.7 mA > 6V AC

Input current	2.05mA @ 10.8V dc 2.28mA @ 12.0 V dc 4.55 mA @ 24 V dc 5.46 mA @ 28.8 V dc 4.76 mA @ 24 V ac
Response time	DC12-24V 0 to 1: Typ. 3ms; 1 to 0: Typ. 3ms AC24V 0 to 1: Typ. 72ms; 1 to 0: Typ. 72ms
Sensor type	Contact or 3-wire PNP
Input type	Resistive
Isolation between power supply and inputs	None
Isolation between inputs	None
Inputs used as digital inputs (I1-I4)	
Input voltage	DC 0-28.8V AC 0-24V
Input signal0	< 5V DC; <0.09 mA < 3V AC
Input signal1	> 8V DC; >0.15mA > 5V AC
Input current	0.16mA @ 10.8V dc 0.18mA @ 12.0 V dc 0.49mA @ 24 V dc 0.62mA @ 28.8 V dc 0.58 mA @ 24 V ac
Response time	DC12-24V 0 to 1: Typ. 5 ms; 1 to 0: Typ. 5 ms AC24V 0 to 1: Typ. 40ms 1 to 0: Typ. 40ms
Maximum counting frequency	Typ.: 4 HZ
Sensor type	Contact or 3-wire PNP
Input type	Resistive
Isolation between power supply and inputs	None
Isolation between inputs	None
Inputs used as analog inputs (I1-I4)	
Measurement range	DC 0---10V
Input impedance	Min, 24K Ω ; Max. 72K Ω
Input voltage	28.8 V DC max
Resolution	10bit ,0.01V
Accuracy at 25 °C	\pm (Max.0.2)V
Isolation between analog channel and power supply	None
Cable length	10 m max. shielded and twisted
Output parameters:	

Output No.	4 (Q1-Q4)
Output type	Relay output
Safety certified load (resistive)	10A,250V AC
Min switching load	6V 1A
Electrical durability Expectancy	10 ⁵ Operations at Rated Resistive Load
Mechanical life	10 ⁷ Operations at No Load condition
Response time	Operate Time: 15 mSec. Max. Release Time: 10 mSec. Max.
Built-in protections	Against short-circuits: None Against over-voltages and overloads: None
Switch frequency:	
Mechanism	10Hz
Resistor/light load	2Hz
Sensitive load	0.5Hz
Other parameters:	
Weight	206.5g / 242.9g(packaging)

Installation Dimensions & Wiring Diagram

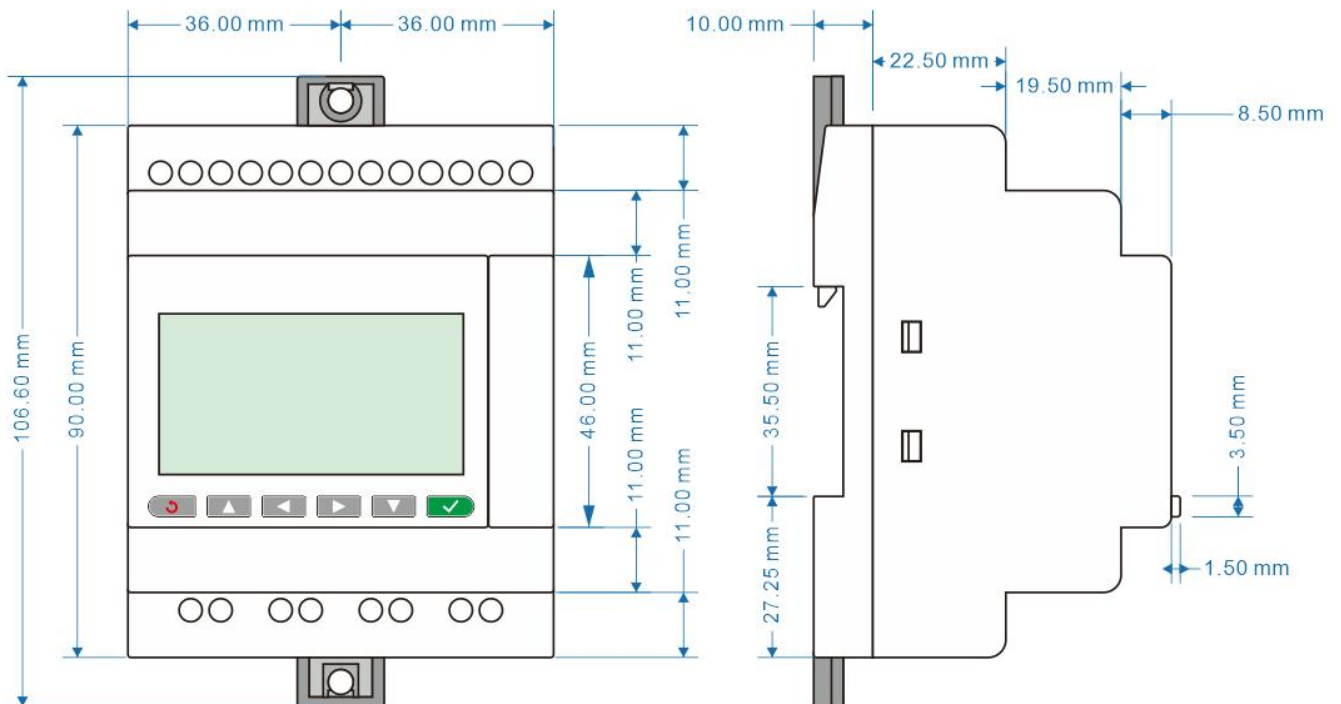

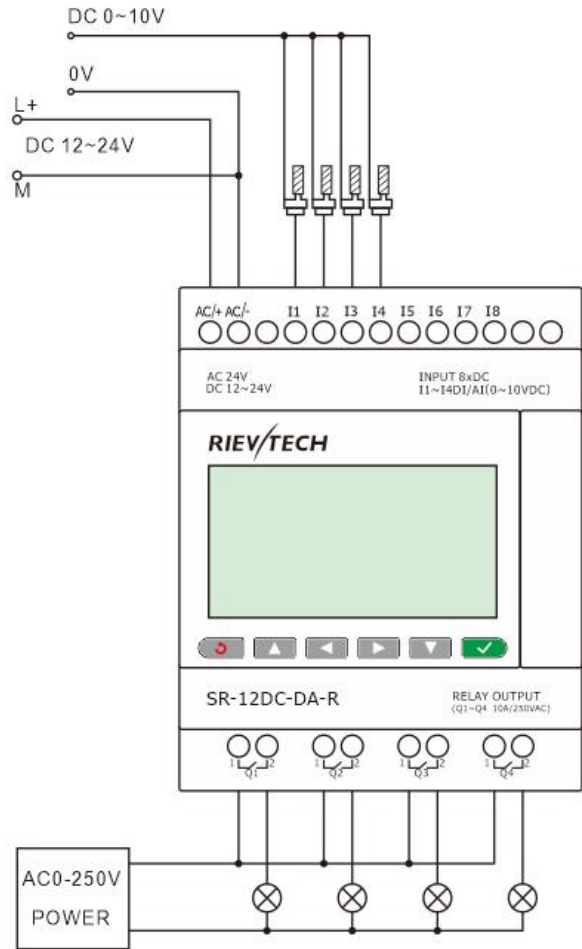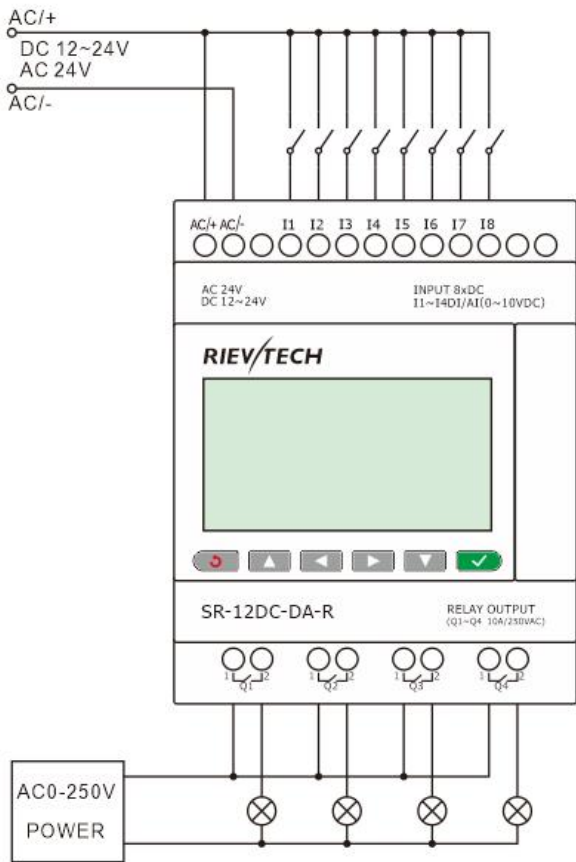

SYSTEM		Operating System requirements		Windows /2000/XP/WIN7/WIN8			
PROGRAMMING LANGUAGES		Programming languages		Function block			
PROGRAM MEMORY		Program Memory		256			
EXECUTION SPEED		Execution Speed		<0.1ms per function			
LCD DISPLAY		LCD Display		4 lines x 16 characters			
FUNCTIONS		Functions		Up to 70 function blocks			
BASIC	Timers						a.On-delay; b.Off-delay etc. Up to 12 kind Timers
	Maximum Number	256					
	Timing Ranges	10ms--99 h59m					
	Counters						a.Up/down Counter b.Hours Counter c.Frequency Threshold Trigger
	Maximum Number	256					
	Highest Count	99999999					
	Resolution	1					
	RTC						a.Weekly Timer b.Yearly Timer
	Number available	256					
	Resolution	1 min					
	Time span available		Week/year-month-day-hour-min				
	Flags						a.Digital Flag b.Analog Flag
	Digital flags	128					
	Analog flags	128					
	PI Functions						a.PI Controller
	Number available	30					
	Parameter Ranges	1-32767					
	Analog Math						a.Analog Math b.Analog Math Error detection
Number available	256						
Function	ADD, Subtract,Multiply, Divide						
Analog Ramp Function						a. Analog Ramp	
Number available	55						
Compare Function						a.Analog compactor b.Comparison of 2 values	
Number available	256						
Special Functions	HMI Screens						a.Message texts
	Number available	16					
	Display/Edit	Preset Current value and Free text					
	Communication Functions						Modbus read write
	Number available	256(Only CPU works as Master need this block, slave does not need)					
	Word/bit data Conversion	Analog watchdog	Analog filter			RS latch relay	
	Data-logger Function	Stop watch	Pulse Relay			Average value	
	Astronomical clock	Boolean function					

Note: 1.Not all program functions are listed in this table i.e. AND,NAND,OR,NOT,NOR,XOR,SHIFT REGISTER,DATA LATCHING RELAY, COMPORT STATUS etc.